

DEVELOP

Dynamic balance


www.develop.eu



ineo 4702P



- > Black & white
A4 printer
- > Up to 47 ppm

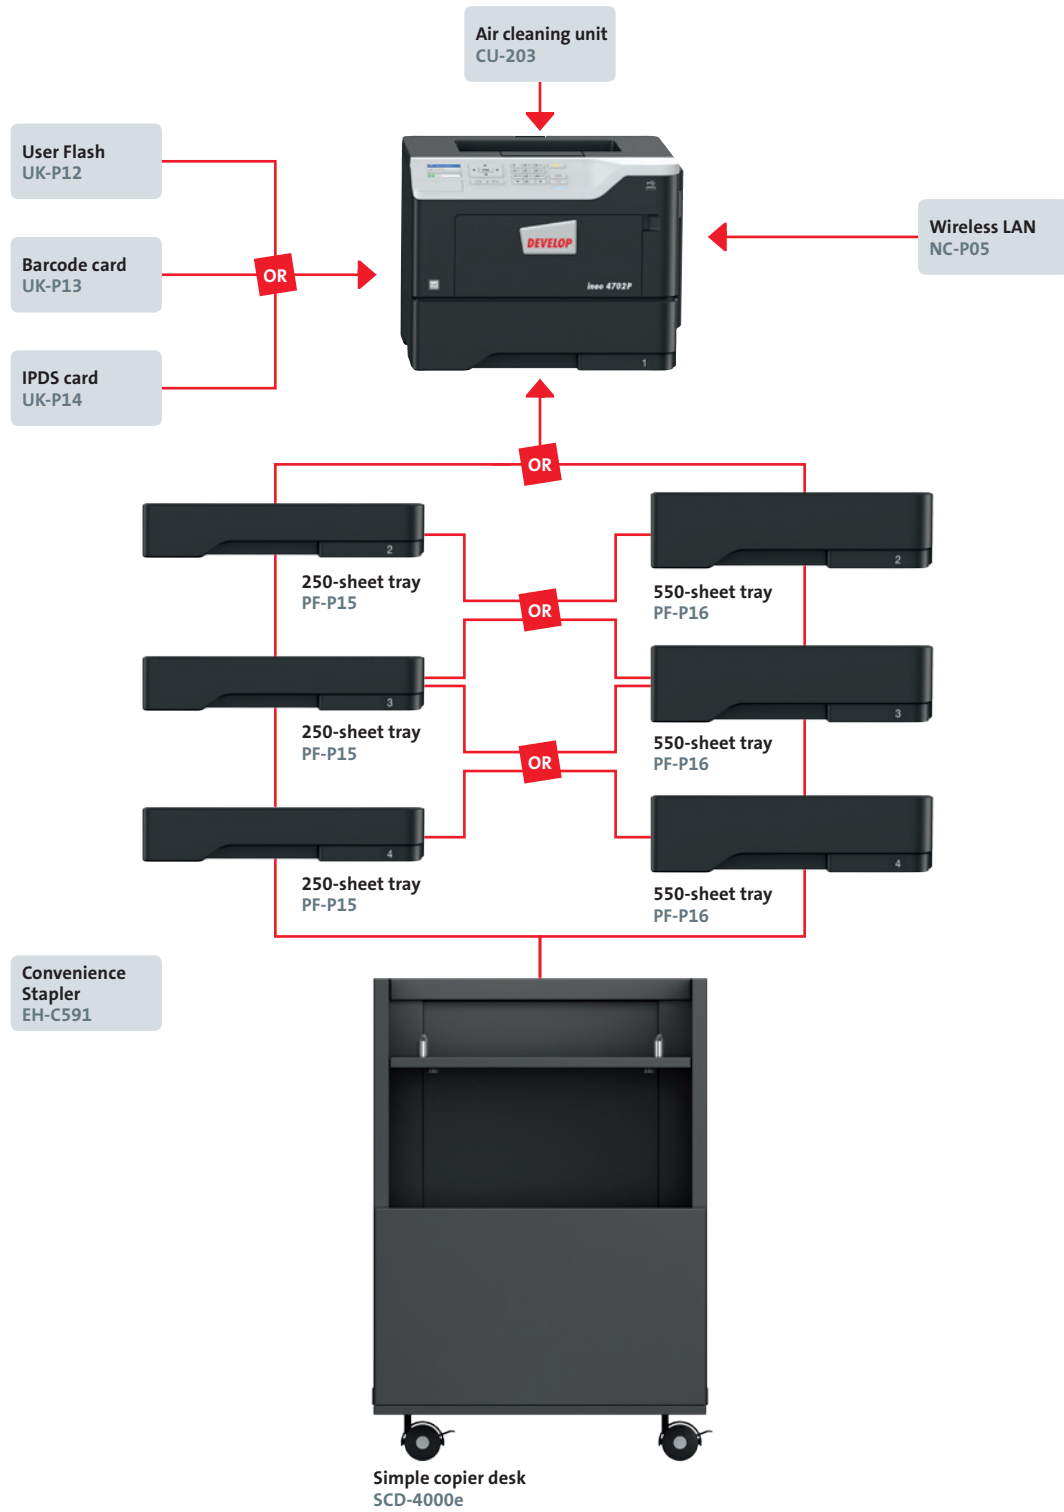

Finishing functionalities



Duplex



Corner stapling (off-line)

Description

ineo 4702P

Laser printer with 47 ppm b/w. Standard Gigabit Ethernet, 512 MB memory, duplex unit, PCL 5/6, PostScript 3 and XPS support. Paper capacity of 550 sheets and 100-sheet manual bypass. Media from A6 to A4 and 60 – 216 g/m².

| | |
|-----------------------|---|
| PF-P15 Paper tray | A5–A4, 250 sheets, 60–120 g/m ² |
| PF-P16 Paper tray | A5–A4, 550 sheets, 60–120 g/m ² |
| SCD-4000e Copier desk | Ensures ergonomic height and provides storage space for print media, etc. |

| | |
|-----------------------------|--|
| UK-P12 User flash | 256 MB User flash for storing fonts, forms and macros or to save job account log |
| UK-P13 Barcode card | Printer-based electronic barcode engine |
| UK-P14 IPDS card | Provides compatibility for IPDS printing |
| NC-P05 Wireless LAN | Wireless LAN to network connector |
| CU-203 Air cleaning unit | Improving indoor air quality by reduced emissions |
| EH-C591 Convenience stapler | Convenient stapling of up to 50 prints per set |

Technical specifications

SYSTEM SPECIFICATIONS

| | |
|-------------------------------|--|
| Panel size/resolution | 2.4" / 320 x 240 |
| System memory | 512 MB (standard) |
| Interface | 10-Base-T/100-Base-TX/1,000-Base-T Ethernet; USB 2.0; Wi-Fi 802.11b/g/n (optional) |
| Network protocols | TCP/IP (IPv4 / IPv6); AppleTalk; Bonjour; SMB; LPD; IPP; SNMP; HTTP/S |
| Printable paper size | A6–A4, customised paper sizes |
| Printable paper weight | 60–216 g/m ² |
| Paper input capacity | Standard: 650 sheets; Max.: 2,300 sheets |
| Paper tray input (standard) | 550 sheets, A6–A4, 60–120 g/m ² |
| Paper tray input (optional) | 3x 250/550 sheets; A5–A4; 60–120 g/m ² |
| Manual bypass | 100 sheets, A6–A4, custom sizes, 60–216 g/m ² |
| Automatic duplexing | A4; 60–90 g/m ² |
| Output capacity | Max.: 250 sheets |
| Print volume (monthly) | Rec.: 7,000 pages Max. ¹ : 175,000 pages |
| Toner lifetime | Up to 25,000 pages |
| Imaging unit lifetime | Up to 60,000 pages |
| Power consumption | 220–240 V / 50/60 Hz; Less than 670 W |
| System dimensions (W x D x H) | 399 x 374 x 303 mm |
| System weight | Approx. 16 kg |

PRINTER SPECIFICATIONS

| | |
|---------------------------|--|
| Printing process | Electrostatic laser |
| Print speed A4 | Up to 47 ppm |
| Autoduplex speed A4 | Up to 24 ppm |
| 1st print out time | 6.5 sec. |
| Print resolution | 1200 x 1200 dpi |
| Page description language | PCL 5/6; PostScript 3; XPS |
| Operating systems | Windows 7 (32/64); Windows 8/8.1 (32/64); Windows 10 (32/64); Windows Server 2008 (32/64); Windows Server 2008 R2; Windows Server 2012; Windows Server 2012 R2; Windows Server 2016; Macintosh OS X 10.9 or later; Linux |
| Printer fonts | 89 PCL Latin; 158 PostScript 3 Emulation Latin |
| Print functions | Duplex, n-up, watermark, electronic sorting, USB direct print (PDF v1.7; TIFF; JPEG; GIF; BMP; PNG; XPS; docx; xlsx; pptx) |
| Mobile Printing | AirPrint (iOS), Mopria (Android), Google Cloud Print, ineoPRINT (iOS/Android/Windows 10 Mobile) optional: Wifi Direct |

SYSTEM FEATURES

| | |
|----------|---|
| Security | TCP/UDP port disabling; certificate management; SNMPv3; IPsec support; HTTPS; IP filtering and port blocking; IEEE 802.1x support; SMTP authentication; Secure print (print hold/PIN) |
| Software | Device Manager (opt.) |

¹ If the maximum volume is reached within a period of one year, then a maintenance cycle must be performed

Cartridge Return Program

DEVELOP Return Program cartridges are patented print cartridges sold at a discount in exchange for the customer's agreement to the license requirement that the cartridges will be used only once and returned only to manufacturer for remanufacturing or recycling. These patented cartridges are licensed for single use only and will stop working after delivering a fixed amount of toner. Toner may remain in the cartridge when replacement is required.

Replacement cartridges sold without these restrictions (non-returnable cartridges) are also available. Please contact a DEVELOP representative for further details and availability.



DEVELOP

Konica Minolta Business Solutions Europe GmbH
 Europaallee 17 30855 Langenhagen Germany Phone +49 511 7404-0 www.develop.eu

For more information regarding the ineo 4702P please refer to the respective product homepage



- All specifications refer to A4-size paper of 80 g/m² quality.
- The support and availability of the listed specifications and functionalities varies depending on operating systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of A4). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- DEVELOP and ineo are registered trademarks/product titles owned by Konica Minolta Business Solutions Europe GmbH.
- Konica Minolta does not warrant that any specifications mentioned will be error-free.
- All brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.